RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

## THIS CARD IS MAINTAINED TO PROVIDE PROCEDURAL TEXT ONLY AND IS NOT REPORTED TO ACMS

CEINUM RA-KB00-016

## 1 STANDARD ISSUE PERSONAL PROTECTIVE EQUIPMENT (PPE) INSP/ACCEPT

#### **REFERENCES:**

COMDTINST M10470.10 (series) Rescue and Survival Systems Manual

TOOLS/TEST EQUIPMENT: NONE

EXPENDABLES: NONE

CONSUMABLES:

Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent)

## A GENERAL INSTRUCTIONS

1. Assign a serial number.

NOTE: The individual serial number is comprised of the first three letters of the member's last name followed by the last four digits of the member's employee identification number, (Example: SN John Smith, EMPLID 1234567, would be SMI4567). In service PPE not individually issued may be assigned a unit generated serial number. Individual serial number for issued standard and cold weather PPE will be the same.

a. Assign an individual serial number if equipment will be issued to an individual.

NOTE: A ready service locker is a stockpile of shared gear and equipment that can be used by scheduled mission personnel during each mission may be used to store returnable items that can be checked out by personnel who do not frequently wear the items, such as sector boarding team, inspections personnel, etc. All gear placed in service that is maintained in the ready service locker shall be labeled with a unit-generated serial number.

- 2. Use the following guidelines for member transfers:
  - a. Members transferring to another unit which utilizes standard issue PPE.
    - (1) Departing unit.
      - (a) Review members AF-538 with the member present to verify accuracy.

DESTRUCTION NOTICE: For classified documents, follow the procedures in DoD 5200.22-M, National Industrial Security Program Operating Manual, Section 5-705 or DoD 5200.1-R, Information Security Program Regulation, Chapter VI, Section 7. For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.



Distribution Statement D: Distribution authorized to the DHS/CG/DoD and their contractors Administrative/Operational use, 01/15/17. Other requests shall be referred to the appropriate asset product line.

WARNING: This document contains technical data whose export is restricted by the Arms Export-Control Act (Title 22, U.S.C., Sec 2751, et. seq.) or the Export Administration Act of 1979, as amended, Title 50, U.S.C. App 2401 et. seq. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DoD Directive 5230.25.



- (b) Unit remove all issued gear from service.
  - 1) Document in the standard issue PPE maintenance record.
- (c) Complete form DD-1149 requisition and invoice/shipping document.
  - NOTE: Standard and cold weather PPE may be shipped together.
- (d) Unit ships, via trackable means, the following items to the new unit:
  - 1) All PPE.
  - 2) Member's AF-538.
  - 3) Appropriate copy of DD-1149 invoice.
  - 4) Standard issue PPE maintenance record.
- (2) Receiving unit.
  - (a) Review the member's AF-538 with the member present to verify accuracy.
  - (b) Re-issue PPE to member, noting any new equipment on the member's form AF-538.
  - (c) Complete acceptance inspection noting any new equipment on the members AF-538, (Refer to Steps 1 B 1. through 1 B 7.).
- b. Members transferring to a unit which does not utilize standard issue PPE.
  - (1) Issuing unit reclaim all returnable PPE items for re-issue, (Refer to COMDTINST M10470.10 (series)).

#### **B** ACCEPTANCE INSPECTION

NOTE: Perform acceptance inspection upon initial issue; when a member transfers in from another unit, or when fitting members who will be using "Ready Service Locker" equipment.

NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair or unserviceable condition. Issued items shall not be removed from service for the purpose of seasonal storage. If an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it.

NOTE: Anti-exposure coveralls are not required to be issued at units assigned to Sectors Guam, Honolulu, Key West, Miami and San Juan.

NOTE: Anti-exposure coveralls are not required to be issued if the member has been issued an authorized Maritime Cold Weather Suit System (MCWSS) or industrial dry suit.

1. Issue required standard PPE items to member, (Refer to Table 1 and Table 2).



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 2 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

NOTE: If standard sized equipment does not provide the proper fit, and the manufacturer is unable to provide special sizing to meet personnel needs, units are authorized to purchase an alternative item that most closely meets the required salient characteristics, (Refer to COMDTINST M10470.10 (series). Units shall make the following notation in the remarks section of the AF-538: "Due to sizing limitations, an alternative item(s) has been issued in lieu of the Item required by the RSSM".

- 2. Inspect anti-exposure coveralls, if issued, (Refer to Steps 2 A 1. through 2 A 3.).
- 3. Inspect all remaining issued PPE, (Refer to Steps 3 A 1. through 3 A 17.).

NOTE: Gentex SOHAH helmets require custom fitting to the member.

- a. Fit Gentex SOHAH helmet to member, if issued, (Refer to Figure 1).
  - (1) Have member don helmet.
  - (2) Fasten nape, chin, and buckle straps until snug.
  - (3) Ensure the ends of the chin strap are attached to the pile fastener on the chin cup once adjusted.

### WARNING

FOR IMPACT PROTECTION AND HELMET STABILITY, YOU MUST KEEP ALL PINK FOAM PADS INSIDE THE SIZING PADS AND ALL SIZING PADS PROPERLY INSTALLED IN THE HELMET WHEN THE HELMET IS WORN. REMOVE THE WHITE FOAM PADS ONLY WHERE NECESSARY TO ADJUST THE FIT.

- (4) Allow the helmet to settle on the head for a few minutes to allow the temperature sensitive pads to conform to the shape of the wearer's head.
- (5) Check the helmet on the wearer's head for the following:
  - (a) The front sizing pads should be just above the wearer's eyebrows.
    - 1) Remove 1-2 white foam pads, if needed, from each of the crown pads.
  - (b) The crown pad cover openings face the inside of the helmet.
- (6) Check helmet spacing around the wearer's head.
  - (a) Verify there is approximately 1/2 inch of space between the wearer's head and the helmet all the way around.
    - 1) Remove 1-2 white foam pads, if needed, from each rear pad cover.
- (7) Check member comfort level.
  - (a) Remove 1-2 white foam pads from each front pad cover, if needed.
- (8) Recheck helmet fit.

NOTE: Mango CEAN XT4 helmet is one size fits all.

b. Verify member fit for Mango CEAN XT4 helmet, if issued, (Refer to Figure 2).



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 3 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

4. Place serial number marking on the following equipment using permanent marker, P/N: 7520-00-973-1059:

> NOTE: Individual serial number may be marked on either the inside or the outside of the zipper cover.

- a. Gear bag on zipper cover.
- b. Anti-exposure coveralls, if issued, under the entry zipper cover near the top.

NOTE: The use of label tape is authorized for labeling boat crew helmet.

- c. Boat crew helmet.
- 5. Record issuer and member document issuance or replacements on members form AF-538.
- 6. Document maintenance in the standard issue PPE maintenance record.
- 7. Document any discrepancies.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 4 of 17



## 2

## SEMI-ANNUAL STANDARD ISSUE PPE INSPECT/CLEAN

## **REFERENCES**:

MPC KB0107.0

## TOOLS/TEST EQUIPMENT:

Sail Needle, P/N: C022, CAGE: 0B590, NIIN: N/A (Or equivalent) (If required)

#### EXPENDABLES: NONE

NONE

## CONSUMABLES:

Anti-Exposure Coveralls, (Refer to Table 2) (If required) Cleaner, Wet/Dry Suit, P/N: 30130, CAGE: 1CAY9, NIIN: N/A (Or equivalent) Cord, Fibrous, P/N: MIL-C-5040, CAGE: 81349, NIIN: 002402154 (Or equivalent) (If required) Leak Test Compound, P/N: MIL-PRF-25567, CAGE: 81349, NIIN: 006211820 (Or equivalent) Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent) (If required) Standard Issue PPE (Refer to Table 2) (If required) Thread, P/N: A-A-59826, CAGE: 81348, NIIN: 005153367 (Or equivalent) (If required) Wax, Paraffin, Technical, P/N: A-A-59255, CAGE: 58536, NIIN: 002852044

## A INSPECT ANTI-EXPOSURE COVERALLS

## WARNING

VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR FULL SAFETY AND HANDLING PROCEDURES.

NOTE: "Ready Service Locker" equipment shall be inventoried on a unit generated inventory log sheet.

NOTE: Anti-exposure coveralls are not required to be issued at units assigned to Sectors Guam, Honolulu, Key West, Miami and San Juan.

NOTE: Anti-exposure coveralls are not required to be issued if the member has been issued an authorized Maritime Cold Weather Suit System (MCWSS) or industrial dry suit.

NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair, or unserviceable condition. If an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it.

NOTE: Issued items shall not be removed from service for the purpose of seasonal storage.

NOTE: Port Security Units (PSU) are authorized to wear subdued colored anti-exposure coveralls.

- 1. Inspect anti-exposure coveralls.
  - a. Lay out the coveralls in a clean area free of obstructions.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 5 of 17



b. Inspect the coveralls for the following:

NOTE: Minor re-stitching of the Velcro patches may be completed using thread and sail needle.

- (1) Check for cuts, tears, seam separation, or loose stitching.
  - (a) Re-stitch coveralls, if necessary, using thread, P/N: A-A-59826, and sail needle.
- (2) Check entry/leg zippers for operability.
- (3) Check for required markings.
- (4) Check condition of installed reflective tape.
- c. Remove anti-exposure coveralls from service if any of the above items are found to be non-repairable.

NOTE: Ensure that anti-exposure coveralls are clean and dry prior to shipping for repair.

- (1) Send anti-exposure coveralls for repair if under warranty or if economical.
- (2) Replace anti-exposure coveralls if repair is not economical, (Refer to Table 2).
- 2. Inspect leak test head pillow.
  - a. Remove inflatable head pillow bladder from cover.
  - b. Inflate head pillow through the oral inflation tube until firm.

## WARNING

#### AVOID EYE CONTACT, INHALATION, AND PROLONGED SKIN CONTACT WITH LEAK TEST COMPOUND. USE IN A WELL VENTILATED AREA. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

- c. Apply leak test compound, P/N: MIL-PRF-25567, to the entire head pillow surface.
- d. Inspect inflated head pillow for signs of leakage.
- e. Remove anti-exposure coveralls from service if the head pillow leakage is found.

NOTE: Ensure that anti-exposure coveralls are clean and dry prior to shipping for repair.

- (1) Send anti-exposure coveralls for repair if under warranty or if economical.
- (2) Replace anti-exposure coveralls if repair is not economical, (Refer to Table 2).
- f. Deflate head pillow through inflation tube.
- g. Place deflated head pillow back into cover.
- h. Ensure oral inflation tube is pulled out, readily accessible.
- 3. Restore individual serial number marking under the entry zipper cover near the top, if faded or unreadable using permanent marker, P/N: 7520-00-973-1059.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 6 of 17



### B INSPECT/TEST SURVIVAL EQUIPMENT

NOTE: For ATON units that are not required to wear a boat crew survival vest, ensure a whistle, fixed blade knife, and a Personal Marker Light (PML) or strobe light is attached to the PFD using a sear cut, 42 inch length of Type 1 nylon cord secured with a bowline followed by an overhand knot.

- 1. Determine if PFD requires survival equipment to be attached.
  - a. Proceed to Step 2 C, if survival equipment is not required.
- 2. Inspect signal whistle, (Refer to MPC KB0107.0).
- 3. Inspect/test strobe light, (Refer to MPC KB0107.0).
- 4. Check for proper attachment of survival equipment to PFD.

NOTE: Finished length of line from knot to knot shall be 36 inches or greater.

a. Attach signal whistle to anti-exposure coveralls, using Type 1 nylon cord, P/N: MIL-C-5040.

NOTE: Sirius LED strobe lights are furnished with a manufacturer installed 42 inch lanyard. The manufacturer installed lanyard is acceptable for use until no longer serviceable.

b. Attach strobe light to anti-exposure coveralls using Type 1 nylon cord.

#### C CLEAN ANTI-EXPOSURE COVERALLS

1. Clean anti-exposure coveralls.

## WARNING

AVOID EYE AND SKIN CONTACT WITH CLEANER. WASH EXPOSED SKIN THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

- a. Hand-wash the coveralls using cleaner, P/N: 30130.
- b. Rinse with freshwater.

### CAUTION

DO NOT DRY ANTI-EXPOSURE COVERALLS USING A MA-CHINE DRYER, HEATER, OR IRON. HEAT WILL DAMAGE THE SUIT.

c. Hang dry coveralls.

#### WARNING

AVOID EYE, SKIN CONTACT, AND INHALATION WITH PARRAFIN WAX. KEEP AWAY FROM OPEN FLAME, WAX CAN CATCH ON FIRE IF OVERHEATED. MELTED PARRAFIN WAX CAN CAUSE THERMAL BURNS. FUMES MAY CAUSE MILD IRRITATION TO NOSE, THROAT AND EYES. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

d. Lubricate zippers using paraffin wax, P/N: A-A-59255.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 7 of 17



#### D INSPECT BOAT CREW HELMET

- 1. Inspect boat crew helmet.
  - a. Inspect helmet shell for cracks, holes, warping, or de-lamination.
    - (1) Replace boat crew helmet if any of the above are noted, (Refer to Table 2).
  - b. Inspect helmet retention/chin strap assembly the following:
    - (1) Cuts, frays, or wear.
    - (2) Operable fasteners.
    - (3) Loose or missing fastening hardware.

NOTE: There is no torque value required, do not over tighten.

- (a) Tighten fastening hardware, (Gentex helmets), (If required).
- 2. Replace worn or damaged helmet retention components, (Refer to Table 2), (If required).

NOTE: Steps 2 D 2.a. through 2 D 2.c.(1) not applicable to boat crew safety helmets used by ATON units, (hardhats).

a. Check sizing/comfort pads for tears, wear, or missing pads.

NOTE: For Gentex SOHAH Helmet, notate the number of white pads in use prior to removal; install replacement pads in the same manner as they were removed.

- (1) Replace sizing/comfort pads if damaged, worn, or missing, (Refer to Table 2).
- b. Check reflective tape, (non-ballistic helmet types).
  - (1) Replace missing or worn tape using 1 inch reflective tape, P/N: 276.
- c. Check installed pile fastener tape, (non-ballistic helmet types).

NOTE: Pile tape sections for Mango CEAN XT4 are available cut to fit for the helmet. Refer to Table 2 for Mango Helmet replacement parts.

- (1) Replace with a 2x3 inch section of pile fastener tape, P/N: MIL-F-21840, if worn or missing.
- 3. Restore helmet serial number marking, if faded or unreadable.

## **E DOCUMENTATION**

- 1. Record issuer and member document issuance or replacements on members form AF-538.
- 2. Document maintenance in the standard issue PPE maintenance record.
- 3. Document "Ready Service Locker" inventory inspection on ready service locker inventory log.
- 4. Store, segregate, or dispose of hazardous materials IAW all applicable local, state, and federal regulations.
- 5. Document any discrepancies.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 8 of 17

3



## ANNUAL STANDARD ISSUE PPE INVENTORY INSPECTION **REFERENCES:** COMDTINST M10470.10 (series) Rescue and Survival Systems Manual Chapter 3 TOOLS/TEST EQUIPMENT: Sharpener, Knife, Hunting, P/N: REPRO400, CAGE: 3GZU3, NIIN: 015147779 (Or equivalent) EXPENDABLES: NONE CONSUMABLES: Fastener Tape, Pile, 2 inch, P/N: MIL-F-21840, CAGE: 81349, NIIN: 010331735 (Or equivalent) (If required) Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent) (If required) Reflective Tape, Self Adhesive, 1 inch SOLAS, P/N: 276, CAGE: 64249, NIIN: N/A (If required) Seam Sealer and Outdoor Repair, Seam Grip, P/N: 630, CAGE: 64249, NIIN: N/A (If required) Standard Issue PPE (Refer to Table 2) (If required) INSPECTION Α WARNING VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR FULL SAFETY AND HANDLING PROCEDURES. NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair or unserviceable condition. If an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it. NOTE: Issued items shall not be removed from service for the purpose of seasonal storage. 1. Inventory issued standard PPE items as listed on members AF-538 form, personal clothing and equipment record, (Refer to Table 1). Issue replacements for any missing items, (Refer to Table 2), (If required). a. Inspect gear bag for the following: 2. a. Cuts or tears. Holes. b. Functional zipper. C. Replace gear bag, (Refer to Table 2), (If required). 3. **DESTRUCTION NOTICE - Destroy by any method that**

will prevent disclosure of contents or reconstruction of the document.

Page 9 of 17



NOTE: Serial number may be marked on either the inside or the outside of the zipper cover.

- 4. Restore gear bag serial number marking if faded or unreadable using permanent marker, P/N: 7520-00-973-1059.
- 5. Inspect rain gear for the following:
  - a. Large tears or holes.
  - b. Inoperable fasteners.
  - c. Unserviceable reflective tape.

## WARNING

AVOID EYE CONTACT, INHALATION, AND PROLONGED SKIN CONTACT WITH ADHESIVE. AVOID INGESTION. KEEP AWAY FROM ALL SOURCES OF IGNITION. WASH EXPOSED SKIN THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

NOTE: Apply seam grip to cover the tear or hole plus an additional 1/4 inch beyond; allow the repair to cure for at least 10 hours.

6. Repair small tears or holes, using seam sealer, P/N: 630.

NOTE: Check sizing and availability at the LSC website: http://www.lifesavingsystems.com.

- 7. Replace rain gear, (Refer to Table 2), (If required).
- 8. Inspect intermediate gloves for the following:
  - a. Rips or holes.
  - b. Seam separation.
- 9. Replace intermediate gloves, (Refer to Table 2), (If required).
- 10. Inspect boat crew goggles for the following:
  - a. Check for cracked or scratched goggle lens.
    - (1) Replace lens if cracked or if scratched inhibiting vision, (Refer to Table 2).
  - b. Check goggle strap for serviceability.
    - (1) Replace goggles if no replacement strap is listed.
    - (2) Replace goggle strap if cut, frayed, or worn, (Refer to Table 2).
- 11. Inspect sunglasses for cracks or scratches.
  - a. Replace sunglasses if cracked, broken, or scratched inhibiting visibility, (Refer to Table 2).
- 12. Inspect temperate/wet weather boots.

NOTE: Check sizing and availability at UDC website (primary): http://www.uscg.mil/uniform/SuperBoot.asp or Belleville website (alternate): http://www.bellevilleboot.com/customer-service/sizing.php.

- a. Inspect the boot upper for tears or seam separation.
  - (1) Replace temperate/wet weather boots if boot upper is torn or separated, (Refer to Table 2).



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 10 of 17



b. Inspect boot soles for wear.

NOTE: Replacement of boots is necessary if the sole is worn beyond the tread depth on the walking surface of the boot tread, feeling for any smooth areas; if any area on the walking surface larger than 4 square inches (2x2 inch) is worn; or if any other condition exists which compromises the protection which the boots are designed to provide.

- (1) Replace temperate/wet weather boots, (If required).
- 13. Inspect boat crew knife.
  - a. Replace boat crew knife if cracked or broken, (Refer to Table 2).
  - b. Sharpen knife blade using knife sharpener.
- 14. Inspect boat shoes, if issued.

NOTE: Check sizing and availability at the UDC website: http://www.uscg.mil/uniform/MensShoesSocks.asp

- a. Replace boat shoes if torn, ripped, or if soles are worn beyond tread depth, (Refer to Table 2).
- 15. Perform anti-exposure coverall INSP/CLEAN, (Refer to Steps 2 A 1. through 2 C 1.d.).
- 16. Perform boat crew helmet/hardhat INSP/CLEAN, (Refer to Steps 2 D 1. through 2 D 3.).
- 17. Record inspector and member document inventory/inspection on page 2 of members form AF-538.
- 18. Record issuer and member document issuance or replacements on members form AF-538.
- 19. Record unit AOPS administrator document inventory in TMT.
- 20. Document maintenance in the standard issue PPE maintenance record.
- 21. Document "Ready Service Locker" inventory inspection on ready service locker inventory log.
- 22. Document any discrepancies.



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 11 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

Item	Required Qty		
**Gear Bag	1 ea		
**Anti-Exposure Coveralls (Not required at Sectors Guam, Honolulu, Key West, Miami, or San Juan units) (Not required if member has been issued an authorized MCWSS or Industrial Dry Suit)	1 ea		
Temperate/Wet Weather Boots	1 pr		
Intermediate Gloves	1 pr		
Boat Crew Goggles	1 ea		
**Boat Crew Helmet	1 ea		
**Boat Crew Knife (Optional at unit level)	1 ea		
**Rain Gear (Optional at members request)	1 se		
Sunglasses	1 pr		
Boat Shoes (Optional)	1 pr		
** MAY BE PART OF READY SERVICE LOCKER EQUIPMENT			

## **STANDARD ISSUE PPE** Table 1



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 12 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

Gear Bag				
Kit Bag, Flyers	P/N: 8460-00-606-8366	CAGE: 83421	NIIN: 006068366 (Or equivalent)	
Anti-Exposure Coveralls (PSU's are authorized to wear subdued color)				
Mustang Deluxe Anti-Exposure Coverall	P/N: MS2175 22	CAGE: 1CJ91	NIIN: N/A	
Stearns Challenger Worksuit	P/N: 1580-CG	CAGE: 63806	NIIN: N/A	
Boat Crew Helmet				
Gentex SOHAH Ballistic, Blue/Small	P/N: 04D11865-11J	CAGE: 97427	NIIN: N/A	
Gentex SOHAH Ballistic, Blue/Med/Large	P/N: 04D11865-8J	CAGE: 97427	NIIN: N/A	
Gentex SOHAH NON-Ballistic, Int. Orange/Small	P/N: 04D11865-4K	CAGE: 97427	NIIN: N/A	
Gentex SOHAH NON-Ballistic, Int. Orange/Med/Large	P/N: 04D11865-1K	CAGE: 97427	NIIN: N/A	
Mango CEAN XT4, Orange	P/N: USCG-CH-XT4	CAGE: 6CLS8	NIIN: N/A	
Safety Helmet, White (ATON Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353139 (Or equivalent)	
Safety Helmet, Yellow (ATON Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353140 (Or equivalent)	
Safety Helmet, Blue (ATON Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353132 (Or equivalent)	
Safety Helmet, Green (ATON Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353134 (Or equivalent)	
Chin Strap (Safety Helmets)	P/N: ES-42	CAGE: 09729	NIIN: 010168034 (Or equivalent)	
Below helmets are authorized for use by Heavy Weather	r/Surf Stations and National Mo	otor Lifeboat School un	til replacement helmets are identifie	
Pro-Tec Alpha (Orange/Red)	P/N: 4811931RMIL	CAGE: Various	NIIN: N/A	
Pro-Tec Ace (Orange/Red)	P/N: B000EYS798	CAGE: Various	NIIN: N/A	
Helmet, Crash	P/N: 458	CAGE: 64249	NIIN: 015593400	
Helmet Replacement Parts				
Gentex SOHAH Helmet Retention Assembly	P/N: 04D11861-1	CAGE: 97427	NIIN: N/A	
Gentex SOHAH Helmet Sizing Pad Set	P/N: 04D11860-10	CAGE: 97427	NIIN: N/A	
Mango Helmet Chin Strap Assembly Set	P/N: USCG-CS-2BS	CAGE: 6CLS8	NIIN: N/A	
Mango Helmet Ear Pad Set	P/N: USCG-EP-2BG	CAGE: 6CLS8	NIIN: N/A	
Mango Helmet Goggle Strap Retainer	P/N: USCG-GR-1BS	CAGE: 6CLS8	NIIN: N/A	
Mango Helmet Head Adjustment (Run)	P/N: USCG-HA-1HS	CAGE: 6CLS8	NIIN: N/A	
Mango Helmet Internal Comfort Padding	P/N: USCG-IP-3CC	CAGE: 6CLS8	NIIN: N/A	
Mango Helmet Loop Patch, Exterior	P/N: USCG-EL-2HL	CAGE: 6CLS8	NIIN: N/A	

# STANDARD ISSUE PPE LIST

Table 2 (Sheet 1 of 3)



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 13 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

Rain Gear					
Raintec, Tri-laminate (S-XXL)	P/N: 610-CG	CAGE: 64249	NIIN: N/A (Or equivalent)		
SAR Life Foul Weather Jacket & Pant (S-XXL)	P/N: 25100-CG	CAGE: 756R8	NIIN: N/A (Or equivalent)		
SAR Life Foul Weather Jacket (S-XXL)	P/N: 25100-JCG	CAGE: 756R8	NIIN: N/A (Or equivalent)		
SAR Life Foul Weather Pant (S-XXL)	P/N: 25100-P	CAGE: 756R8	NIIN: N/A (Or equivalent)		
Gloves, Intermediate					
Gill Championship, Long Finger, Men's XS-XXL	P/N: 7250	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Championship, Long Finger, Women's S-L	P/N: 7260	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Championship, Short Finger, XS-XXL	P/N: 7240	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Deckhand Gloves, Long Finger, XS-XL	P/N: 7050	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Deckhand, Short Finger XS-XL	P/N: 7040	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Championship, Long Finger, Women's S-L	P/N: 7260	CAGE: KC631	NIIN: N/A (Or equivalent)		
Gill Deckhand Gloves, Long Finger, XS-XL	P/N: 7050	CAGE: KC631	NIIN: N/A (Or equivalent)		
Outdoor Research Gripper Gloves, Full Finger, Men's S-XL	P/N: 70222	CAGE: 096Y0	NIIN: N/A (Or equivalent)		
Outdoor Research Gripper Gloves, Full Finger, Women's S-L	P/N: 70217	CAGE: U0692	NIIN: N/A (Or equivalent)		
Boat Crew Ballistic Goggles ***					
Goggles, Industrial (ESS Profile)	P/N: EP01BK-TSB	CAGE: 1NG39	NIIN: 015046222		
Goggles, Industrial (Revision Desert Locust Black)	P/N: 4-0309-9500	CAGE: 30VZ5	NIIN: 015476227		
***Units not requiring a ballistic goggle may continue to utilize legacy non-ballistic goggles (Scott) until they become unserviceable; all new procurements will be in accordance with Table 2.					
Goggle Replacement Parts					
ESS Profile, Clear	P/N: 740-0113	CAGE: 1NG39	NIIN: N/A		
ESS Profile, Smoke	P/N: 740-0119	CAGE: 1NG39	NIIN: N/A		
Strap, ESS Profile	P/N: EP4-A	CAGE: 3GG46	NIIN: N/A		
Lens, Goggles, Industrial (Revision Desert Locust, Clear)	P/N: 4-0331-9100	CAGE: 30VZ5	NIIN: 015476568		
Lens, Goggles, Industrial (Revision Desert Locust, Smoke)	P/N: 4-0331-9200	CAGE: 30VZ5	NIIN: 015476567		
Ballistic Goggle Prescription Insert	P/N: P-2B	CAGE: 1NG39	NIIN: N/A (Or equivalent)		
Sunglasses					
Spectacle Kit, Interchangeable Component (ESS Ice)	P/N: ESSICE-2	CAGE: 1NG39	NIIN: 015255085		
Spectacle Kit, Eye Safety System (ESS Ice 2N)	P/N: ESSICE-2N	CAGE: 1NG39	NIIN: 015376143		
Spectacle, Combo Pack, (UVEX XC)	P/N: S99-S3399-MIL3A	CAGE: 39SU9	NIIN: 015165361		
Spectacle, Combo Pack, (UVEX Genesis)	P/N: S99-S3291-MIL	CAGE: 39SU9	NIIN: 015524131		
Safety Glasses, (Revision Sawfly Eyewear)	P/N: 4-0076-9800	CAGE: 30VZ5	NIIN: 015274051		
Spectacles, Industrial (Wiley X PT 1)	P/N: PT-1SC	CAGE: 0S7V7	NIIN: 015107853		

## STANDARD ISSUE PPE LIST

Table 2 (Sheet 2 of 3)



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 14 of 17

RESCUE AND ASSISTANCE KB0026.0 REV'D 01/15/17

Boots, Temperate, Wet Weather					
Primary-Boots, Safety (Composite Toe)	P/N: BM/BF (Size)	CAGE: CG UDC	NIIN: N/A		
Alternate-Belleville	P/N: 800ST	CAGE: 00P07	NIIN: N/A		
Boat Crew Knife (Blade length not to exceed 4 inches)					
Benchmade	P/N: 550S	CAGE: 041N2	NIIN: 014510707 (Or equivalent)		
Spyderco	P/N: C10SBK	CAGE: 0ZKZ2	NIIN: 014326186 (Or equivalent)		
Boat Shoes (Optional)					
Shoes, Boat	P/N: BSM/BSF (Size)	CAGE: CG UDC	NIIN: N/A		

## STANDARD ISSUE PPE LIST Table 2 (Sheet 3 of 3)



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 15 of 17

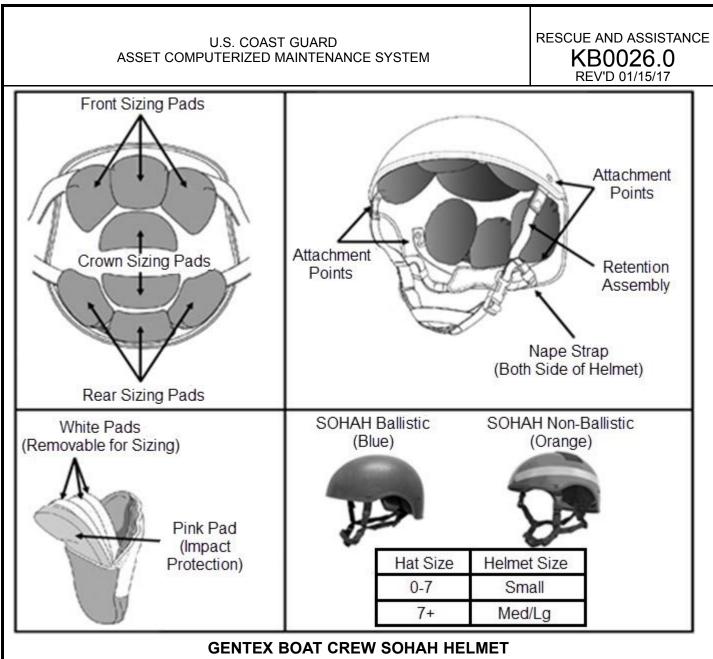


Figure 1



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Page 16 of 17

