

**THIS CARD IS MAINTAINED TO PROVIDE PROCEDURAL  
TEXT ONLY AND IS NOT REPORTED TO ACMS**

**CEINUM RA-KB00-022**

**1 TYPE I, II, OR III PERSONAL FLOTATION DEVICE (PFD) INSP/ACCEPT**

REFERENCES:

MPC [KB0107.0](#)

TOOLS/TEST EQUIPMENT:

NONE

EXPENDABLES:

NONE

CONSUMABLES:

Cord, Fibrous (Type I Nylon Cord Lanyard), P/N: MIL-C-5040, CAGE: 81349, NIIN: 002402154 (If required)  
Fastener Tape, Pile, P/N: A-A-55126, CAGE: 58536, NIIN: 010331735 (Or equivalent) (If required)  
Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent)  
Pocket, Pro Lite Orange, P/N: 481-P, CAGE: 04CY8, NIIN: N/A (Or equivalent) (If required)  
Urethane Repair Adhesive, P/N: 477, CAGE: 64249, NIIN: N/A (If required)

**A INSPECT PERSONAL FLOTATION DEVICE (PFD)**

**WARNING**

**VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON  
THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING  
THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR  
FULL SAFETY AND HANDLING PROCEDURES.**

*NOTE: Individual Alien Migrant Interdiction Operations (AMIO) PFD  
maintenance/discrepancy recording is not required. Maintenance for  
all unit AMIO PFDs may be recorded on a single record that includes  
PFD count and maintenance completed indicator.*

1. Apply a locally generated serial number to the Coast Guard approval label using permanent marker, P/N: 7520-00-973-1059, (If required).
2. Inspect PFD, (Refer to Step [2 A 1.](#) through Step [2 A 9.](#)).

Distribution Statement D: Distribution authorized to the DHS/CG/DoD and their contractors Administrative/Operational use, 08/26/16. Other requests shall be referred to the appropriate asset product line.

WARNING: This document contains technical data whose export is restricted by the Arms Export-Control Act (Title 22, U.S.C., Sec 2751, et. seq.) or the Export Administration Act of 1979, as amended, Title 50, U.S.C. App 2401 et. seq. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DoD Directive 5230.25.

DESTRUCTION NOTICE: For classified documents, follow the procedures in DoD 5200.22-M, National Industrial Security Program Operating Manual, Section 5-705 or DoD 5200.1-R, Information Security Program Regulation, Chapter VI, Section 7. For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.



**CAUTION**

**PFDS THAT WILL BE USED IN TEMPERATURES BELOW 50° FAHRENHEIT SHALL HAVE THE STROBE LIGHT INSTALLED IN LIEU OF THE PERSONAL MARKER LIGHT (PML).**

*NOTE: PFDs not worn in conjunction with the Boat Crew Survival Vest or the Tactical PFD Rescue Equipment Pouch shall have a signal whistle and either a strobe light or Personal Marker Light (PML) attached to the PFD. Type I PFDs, when used as an abandon ship life preserver, shall have a whistle and strobe light attached. The Boat Crew Survival Vest and Tactical PFD Rescue Equipment Pouch are equipped and maintained separately from the PFD.*

*NOTE: ATON units shall include the fixed-blade knife as part of their minimum gear when the Boat Crew Survival Vest is not worn.*

*NOTE: Section B, Attach Survival Equipment to PFD, is not required for AMIO PFDs.*

3. Determine if PFD requires survival equipment attachment.

**B ATTACH SURVIVAL EQUIPMENT TO PFD (IF REQUIRED)**

1. Inspect signal whistle, (Refer to MPC [KB0107.0](#)).

*NOTE: Visual Distress Signal (VDS) is the Personal Marker Light (PML) or the strobe light. If PFD will be worn in temperatures below 50° F, a strobe light shall be used. If a Type I PFD is used as an abandon ship life preserver, it shall have a whistle and strobe light attached.*

2. Inspect selected VDS, (Refer to MPC [KB0107.0](#)).
3. Inspect fixed-blade knife (ATON units), (Refer to MPC [KB0107.0](#)).
4. Attach signal whistle to PFD or equipment pocket (Type I PFD).
  - a. Remove split ring from whistle.

*NOTE: Finished length of line from knot to knot shall be 36 inches or greater.*

- b. Attach whistle to PFD using a sear cut, 42 inch length of Type I nylon cord, P/N: MIL-C-5040, secured with a bowline and overhand knot on each end.

5. Attach selected VDS to PFDs.

- a. Clip PML to PFD (if selected VDS).

- (1) Proceed to Step [1 B 6](#). If PML is selected VDS.

*NOTE: Sirius LED strobe lights are furnished with a manufacturer installed 42 inch lanyard. The manufacturer installed lanyard is acceptable for use until no longer serviceable.*

*NOTE: Finished length of line from knot to knot shall be 36 inches or greater.*

- b. Attach strobe light to PFD using a sear cut, 42 inch length of Type I nylon cord secured with a bowline and overhand knot.



**WARNING**

**AVOID EYE CONTACT, SKIN CONTACT, INHALATION, AND INGESTION WITH ADHESIVE. USE IN A WELL VENTILATED AREA. WASH EXPOSED SKIN AND CONTAMINATED CLOTHING THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.**

*NOTE: PFDs with strobe lights attached shall have a 2 x 2 inch section of pile fastener tape attached to the upper left side of the PFD for strobe light attachment.*

- (1) Attach pile fastener tape, P/N: A-A-55126, to PFD using adhesive, P/N: 477.

*NOTE: Finished length of lanyard from knot to knot shall be 36 inches or greater.*

6. Attach fixed-blade knife to PFD using a sear cut, 42 inch length of Type I nylon cord lanyard (ATON units).

*NOTE: An equipment pocket may be used on Type I PFDs to stow the survival equipment at unit discretion.*

7. Attach equipment pocket, P/N: 481-P, to Type I PFD, (Refer to [Figure 1](#)), (If required),
  - a. Stow survival equipment in equipment pocket.

8. Store, segregate, or dispose of hazardous materials IAW all applicable local, state, and federal regulations.

*NOTE: Individual AMIO PFD maintenance/discrepancy recording is not required. Maintenance for all unit AMIO PFDs may be recorded on a single record that includes PFD count and maintenance completed indicator.*

9. Document maintenance in the Ready Service Locker Inventory Log, (If required).
10. Document maintenance in the Rescue and Survival Systems/Equipment Maintenance Record.
11. Document any discrepancies.



## 2 SEMIANNUAL TYPE I, II, OR III PERSONAL FLOTATION DEVICE (PFD) INSP/CLN

### REFERENCES:

MPC [KB0107.0](#)

### TOOLS/TEST EQUIPMENT:

Sail Needle, P/N: C022, CAGE: 0B590, NIIN: N/A (Or equivalent) (If required)

### EXPENDABLES:

NONE

### CONSUMABLES:

Cleaner, Wet/Dry Suit, P/N: 30130, CAGE: 1CAY9, NIIN: N/A (Or equivalent)

Personal Flotation Device, Type I, II, or III (Refer to [Table 1](#)) (If required)

Pocket, Pro Lite Orange, P/N: 481-P, CAGE: 04CY8, NIIN: N/A (Or equivalent) (If required)

Thread (Nylon, Size E), P/N: A-A-59826, CAGE: 81348, NIIN: 005153367 (If required)

Topside Ensemble, Cold Weather Diving (CWDTE) (CG Dive Personnel Only) (Refer to [Table 1](#)) (If required)

## A INSPECT PFD

### WARNING

**VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR FULL SAFETY AND HANDLING PROCEDURES.**

*NOTE: AMIO PFDs are required to be inspected and cleaned annually. In-service Type II PFDs may remain until no longer serviceable; authorized replacement Type II PFDs are listed in [Table 1](#).*

*NOTE: Use the following inspection procedures as applicable to PFD type.*

1. Inspect PFD over its entire surface for the following:
  - a. Cuts or tears.
  - b. Seam separation.
  - c. Loose stitching.
  - d. Missing or worn reflective tape.

*NOTE: For PFDs with mesh construction, tears in the mesh less than 1 inch in diameter or 3 inches long may be repaired utilizing a local tailoring service. Repairs are to be made using nylon upholstery thread the same color as the mesh and must not detract from the neat appearance and proper function of the gear.*

*NOTE: Velcro patches on pockets may be re-stitched using size "E" nylon thread.*

2. Repair PFD using size "E" nylon thread, P/N: A-A-59826, and needle, P/N: C022, if any repairable discrepancies are found.
3. Replace PFD if non-repairable, (Refer to [Table 1](#)).



4. Inspect for condition/serviceability of the following PFD securing mechanisms:
  - a. Slide fasteners.
  - b. Attachment buckles.
  - c. Adjustment straps.
5. Replace PFD if any of the above discrepancies are noted, (Refer to [Table 1](#)).
6. Inspect attached D-ring for the following:
  - a. Security of attachment.
  - b. Corrosion.
  - c. Damage or wear.
7. Replace PFD if any of the above discrepancies are noted, (Refer to [Table 1](#)).
8. Check legibility of required PFD markings.
  - a. Replace PFD if required PFD markings are missing or unreadable, (Refer to [Table 1](#)).
9. Restore unit generated serial number marking if faded or unreadable.
10. Proceed to Step [2 C 1](#). if PFD has any of the following discrepancies below are noted:
  - a. PFD is worn in conjunction with the Boat Crew Survival Vest.
  - b. PFD is used for AMIO.

**B INSPECT ATTACHED SURVIVAL EQUIPMENT (IF REQUIRED)**

**CAUTION**

**PFDS THAT WILL BE USED IN TEMPERATURES BELOW 50° FAHRENHEIT SHALL HAVE THE STROBE LIGHT INSTALLED IN LIEU OF THE PERSONAL MARKER LIGHT.**

*NOTE: PFDs not worn in conjunction with the Boat Crew Survival Vest or the Tactical PFD Rescue Equipment Pouch shall have a signal whistle and either a strobe light or PML attached to the PFD. The Boat Crew Survival Vest and Tactical PFD Rescue Equipment Pouch are equipped and maintained separately from the PFD.*

1. Inspect attached survival equipment, (Refer to MPC [KB0107.0](#)).

*NOTE: Finished length of lanyard from knot to knot shall be 36 inches or greater.*
2. Inspect lanyards attaching survival equipment to PFD for cuts, frays, and for correct length.
  - a. Replace lanyard if any discrepancies are noted.
3. Inspect lanyards for security of attachment between equipment and pouch or PFD.
  - a. Re-tie lanyard if discrepancies are found, (Refer to Step [1 B 4](#). through Step [1 B 6](#).).
4. Check for worn or missing pile fastener tape located on the upper left side the PFD, if outfitted with strobe light.
  - a. Replace pile fastener tape if worn or missing, (Refer to Step [1 B 5.b.\(1\)](#)).
5. Inspect survival equipment pocket (Type I PFDs only) for the following, (If attached):
  - a. Cuts or tears.



- b. Operability of slide fasteners.
- 6. Replace equipment pocket, P/N: 481-P, if any discrepancies are noted.

**C CLEAN PFD**

**WARNING**

**AVOID EYE AND SKIN CONTACT WITH CLEANER. WASH EXPOSED SKIN THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.**

- 1. Hand-wash the PFD using cleaner, P/N: 30130, and freshwater.
- 2. Rinse PFD with freshwater.

**CAUTION**

**DO NOT DRY PFD USING A MACHINE DRYER, HEATER, OR IRON. HEAT WILL DAMAGE THE PFD.**

- 3. Hang the PFD out of direct sunlight until completely dry.
- 4. Store, segregate, or dispose of hazardous materials IAW all applicable local, state, and federal regulations.

*NOTE: Individual AMIO PFD maintenance/discrepancy recording is not required. Maintenance for all unit AMIO PFDs may be recorded on a single record that includes PFD count and maintenance completed indicator.*

- 5. Document maintenance in the Ready Service Locker Inventory Log, (If required).
- 6. Document maintenance in the Rescue and Survival Systems/Equipment Maintenance Record.
- 7. Document any discrepancies.



<b>MUSTANG MJ6214 FLOAT COAT TYPE III</b>		
P/N: MJ6214-22 S	CAGE: 1CJ91	NIIN: N/A
P/N: MJ6214-22 M	CAGE: 1CJ91	NIIN: N/A
P/N: MJ6214-22 L	CAGE: 1CJ91	NIIN: N/A
P/N: MJ6214-22 XL	CAGE: 1CJ91	NIIN: N/A
P/N: MJ6214-22 XXL	CAGE: 1CJ91	NIIN: N/A
P/N: MJ6214-22 XXXL	CAGE: 1CJ91	NIIN: N/A
<b>STEARNS I077 FLOAT COAT TYPE III</b>		
P/N: 344-CG XS	CAGE: 64249	NIIN: N/A
P/N: 344-CG S	CAGE: 64249	NIIN: N/A
P/N: 344-CG M	CAGE: 64249	NIIN: N/A
P/N: 344-CG L	CAGE: 64249	NIIN: N/A
P/N: 344-CG XL	CAGE: 64249	NIIN: N/A
P/N: 344-CG XXL	CAGE: 64249	NIIN: N/A
P/N: 344-CG XXXL	CAGE: 64249	NIIN: N/A
<b>UNITED SAR INC DELUXE FLOTATION JACKET TYPE III</b>		
P/N: 20050-CG	CAGE: 756R8	NIIN: N/A
<b>STEARNS 4185 TYPE III</b>		
P/N: 430-CG 4XL	CAGE: 64249	NIIN: N/A
P/N: 430-CG 4XL	CAGE: 64249	NIIN: N/A
P/N: 430-CG L	CAGE: 64249	NIIN: N/A
P/N: 430-CG M	CAGE: 64249	NIIN: N/A
P/N: 430-CG S	CAGE: 64249	NIIN: N/A
P/N: 430-CG XL	CAGE: 64249	NIIN: N/A
P/N: 430-CG XXXL	CAGE: 64249	NIIN: N/A
<b>MUSTANG MV3128 22 TYPE III</b>		
P/N: MV3128-22 S	CAGE: 1CJ91	NIIN: N/A
P/N: MV3128-22 M	CAGE: 1CJ91	NIIN: N/A
P/N: MV3128-22 L	CAGE: 1CJ91	NIIN: N/A
<b>MUSTANG MV1254 22 TYPE III</b>		
P/N: MV1254-22 M	CAGE: 1CJ91	NIIN: N/A
P/N: MV1254-22 XL	CAGE: 1CJ91	NIIN: N/A
P/N: MV1254-22 XXXL	CAGE: 1CJ91	NIIN: N/A

**PFD-NIIN REFERENCE TABLE**

**Table 1  
(Sheet 1 of 2)**



**DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.**

<b>STEARNS I424 TYPE III</b>		
P/N: 460-CG S	CAGE: 64249	NIIN: N/A
P/N: 460-CG M	CAGE: 64249	NIIN: N/A
P/N: 460-CG L	CAGE: 64249	NIIN: N/A
P/N: 460-CG XL	CAGE: 64249	NIIN: N/A
P/N: 460-CG XXL	CAGE: 64249	NIIN: N/A
P/N: 460-CG XXXL	CAGE: 64249	NIIN: N/A
P/N: 460-CG S	CAGE: 64249	NIIN: N/A
P/N: 460-CG M	CAGE: 64249	NIIN: N/A
P/N: 460-CG L	CAGE: 64249	NIIN: N/A
P/N: 460-CG XL	CAGE: 64249	NIIN: N/A
P/N: 460-CG XXL	CAGE: 64249	NIIN: N/A
P/N: 460-CG XXXL	CAGE: 64249	NIIN: N/A
<b>STEARNS I465 TYPE III</b>		
P/N: 320-CG S	CAGE: 64249	NIIN: N/A
P/N: 320-CG M	CAGE: 64249	NIIN: N/A
P/N: 320-CG L	CAGE: 64249	NIIN: N/A
P/N: 320-CG XL	CAGE: 64249	NIIN: N/A
P/N: 320-CG XXL	CAGE: 64249	NIIN: N/A
P/N: 320-CG XXXL	CAGE: 64249	NIIN: N/A
<b>UNITED SAR INC DELUXE MESH PFD TYPE III</b>		
P/N: 20010-CG	CAGE: 756R8	NIIN: N/A
<b>TYPE I PFDS</b>		
P/N: MODEL 1600-ORG-NAV	CAGE: 64249	NIIN: 014851135
P/N: 321	CAGE: 64249	NIIN: 014832762
P/N: 329	CAGE: 64249	NIIN: N/A
<b>TYPE II PFDS</b>		
P/N: PFD10 (Child)	CAGE: 2R389	NIIN: N/A
P/N: PFD10 (Youth)	CAGE: 2R389	NIIN: N/A
P/N: PFD10 (Adult)	CAGE: 2R389	NIIN: N/A
<b>COLD WEATHER DIVING TOPSIDE ENSEMBLE (CG DIVE PERSONNEL ONLY)</b>		
Thermo System Plus Coat, P/N: MC1534	CAGE: 1CJ91	NIIN: N/A
Integrity HX Bib Pants, P/N: MP4225	CAGE: 1CJ91	NIIN: N/A


**PFD-NIIN REFERENCE TABLE**

**Table 1  
(Sheet 2 of 2)**



**DESTRUCTION NOTICE** - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.



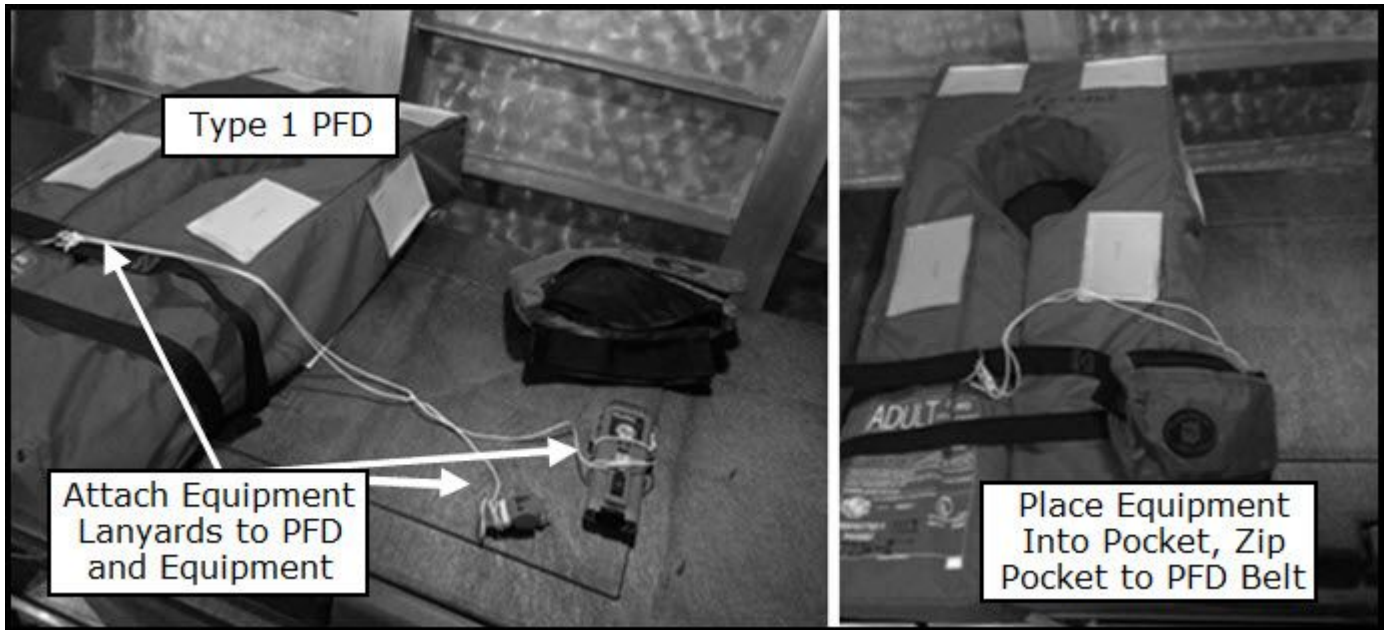

**EQUIPMENT POUCH ON TYPE I PFD**

**Figure 1**

